

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
21 June 2001 (21.06.2001)

PCT

(10) International Publication Number  
**WO 01/45408 A1**


- (51) International Patent Classification<sup>7</sup>: H04N 7/16, 7/173 (74) Agent: WHITE, Andrew, G.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: PCT/EP00/12263
- (22) International Filing Date: 5 December 2000 (05.12.2000) (81) Designated States (*national*): CN, IN, JP, KR.
- (25) Filing Language: English (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (26) Publication Language: English
- (30) Priority Data:  
09/466,406 17 December 1999 (17.12.1999) US
- (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor: GUTTA, Srinivas; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

**Published:**

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR RECOMMENDING TELEVISION PROGRAMMING USING DECISION TREES

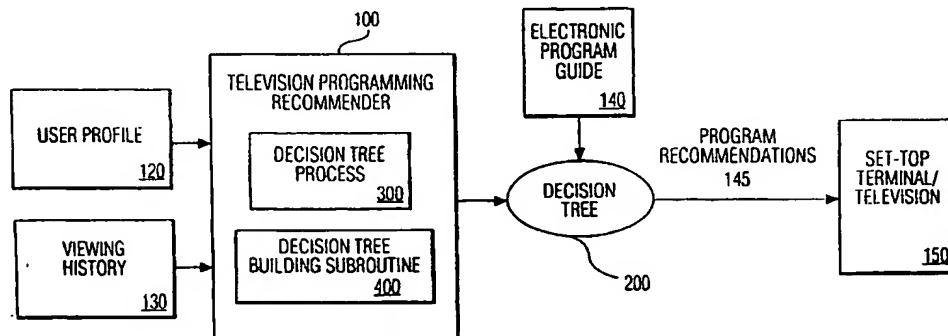

(57) Abstract: A method and apparatus are disclosed for recommending television programming using decision trees. Inductive principles are utilized to identify a set of recommended programs that may be of interest to a particular viewer, based on past viewing behavior. A user's viewing history (130) is monitored and the shows that are actually watched by a user (positive examples) and the shows that are not watched by the user (negative examples) are analyzed. For each positive and negative program example (i.e., programs watched and not watched), a number of program attributes are classified in the user profile. The various attributes are then positioned in a hierarchical decision tree (200) based on a ranking of the entropy of each attribute. Each node and sub-node in the decision tree corresponds to a given attribute from the user profile. Each leaf node in the decision tree corresponds to either a positive or negative recommendation for a program mounted at the corresponding leaf node. The decision tree is (200) built using a decision tree process (300) that implements a "top-down divide and conquer" approach. The decision tree can thereafter be applied to an electronic program guide (140) to make program recommendations.

WO 01/45408 A1

## Method and apparatus for recommending television programming using decision trees

The present invention relates to a method and apparatus for recommending television programming, and more particularly, to a method and apparatus for recommending television programming through the use of decision trees.

5

As the number of channels available to television viewers has increased, along with the diversity of the programming content available on such channels, it has become increasingly challenging for television viewers to identify television programs of interest. Historically, television viewers identified television programs of interest by analyzing printed television program guides. Typically, such printed television program guides contained grids listing the available television programs by time and date, channel and title. As the number of television programs has increased, the ability to effectively identify desirable television programs using such printed guides has become impractical.

More recently, television program guides have become available in an electronic format, often referred to as electronic program guides (EPGs). Like printed television program guides, EPGs contain grids listing the available television programs by time and date, channel and title. An EPG, however, allows television viewers to sort or search the available television programs in accordance with personalized preferences. In addition, EPGs allow for on-screen presentation of the available television programs.

While EPGs allow viewers to identify desirable programs more efficiently than conventional printed guides, they suffer from a number of limitations, which if overcome, could further enhance the ability of viewers to identify desirable programs. For example, many viewers have a particular preference towards, or bias against, certain categories of programming, such as action-based programs or sports programming. Thus, the viewer preferences can be applied to the EPG to obtain a set of recommended programs that may be of interest to a particular viewer.

Thus, a number of tools have been proposed or suggested for recommending television programming. The Tivo™ system, for example, commercially available from Tivo,

Inc., of Sunnyvale, California, allows viewers to rate shows using a "Thumbs Up and Thumbs Down" feature and thereby indicate programs that the viewer likes and dislikes, respectively. Thereafter, the TiVo receiver matches the recorded viewer preferences with received program data, such as an EPG, to make recommendations tailored to each viewer.

5           Thus, such tools for recommending television programming provide selections of programs that a viewer might like, based on the viewer's past viewing history as well as a profile containing viewer preferences. In fact, such tools for recommending television programming generally require explicit profile information from the user. Viewers, however, may not take the time required to sufficiently detail their viewing preferences in a user  
10   profile. A need therefore exists for a method and apparatus for recommending television programming based on the viewer's past viewing history. A further need exists for a method and apparatus for recommending television programming that does not require any explicit profile information from the viewer.

15           Generally, a method and apparatus are disclosed for recommending television programming using decision trees. According to one aspect of the invention, inductive principles are utilized to identify a set of recommended programs that may be of interest to a particular viewer, based on the past viewing history of a user.

20           The present invention monitors a user's viewing history and analyzes the shows that are actually watched by a user (positive examples) and the shows that are not watched by the user (negative examples). For each positive and negative program example (i.e., programs watched and not watched), a number of program attributes are classified in the user profile, such as the time, date, duration, channel, rating, title and genre of a given  
25   program. The various attributes are then positioned in the hierarchical decision tree based on a ranking of the entropy of each attribute. Each node and sub-node in the decision tree corresponds to a given attribute from the user profile. Each leaf node in the decision tree corresponds to either a positive or negative recommendation for a program mounted at the corresponding leaf node. The decision tree attempts to cover as many positive examples as  
30   possible but none of the negative examples.

          The television programming recommender of the present invention processes a user profile, if available, and the viewing history of a user to generate a decision tree. The decision tree is built using a decision tree process that implements a "top-down divide and conquer" approach. The decision tree can thereafter be applied to an electronic program guide

to make program recommendations. The program recommendations may be, for example, a set of recommended programs that may be of interest to a particular viewer.

A more complete understanding of the present invention, as well as further features and advantages of the present invention, will be obtained by reference to the following detailed description and drawings.

Fig. 1 illustrates a television programming recommender in accordance with the present invention;

Fig. 2 illustrates a hierarchical decision tree that positions the various attributes of television programs in the tree based on a ranking of the entropy of each attribute;

Fig. 3 is a flow chart describing an exemplary decision tree process embodying principles of the present invention;

Fig. 4 is a flow chart describing an exemplary decision tree building subroutine embodying principles of the present invention;

Fig. 5 is a sample table illustrating the creation of a decision tree in accordance with well-known techniques; and

Fig. 6 illustrates the resulting decision tree corresponding to the example of Fig. 5.

Fig. 1 illustrates a television programming recommender 100 in accordance with the present invention. The disclosed television programming recommender 100 utilizes inductive principles to identify a set of recommended programs that may be of interest to a particular viewer. The present invention monitors a user's viewing history and analyzes the shows that are actually watched by a user (positive examples) and the shows that are not watched by the user (negative examples). Thereafter, the present invention discriminates between the positive and negative examples by building a decision tree that attempts to cover as many positive examples as possible but none of the negative examples.

According to another feature of the present invention, the television programming recommender 100 makes recommendations without requiring any explicit profile information from the user. When available, explicit user profile information augments the recommendations produced by the television programming recommender 100. The

television programming recommender 100 typically learns by observing the user's viewing habits over time and generalizing the viewing habits to build a user profile that attempts to cover as many positive examples as possible but none of the negative examples.

As shown in Fig. 1, the television programming recommender 100 processes a user profile 120, if available, and a user's viewing history 130 to generate a decision tree 200. It is noted that the results of processing the user viewing history 130 can be stored in the form of updates to the user profile 120. The decision tree 200 may be applied to an electronic program guide 140 to make program recommendations. The program recommendations may be, for example, a set of recommended programs that may be of interest to a particular viewer.

As shown in Fig. 1, the television programming recommender 100 contains a decision tree process 300, discussed further below in conjunction with Fig. 3, that generates a decision tree for a given user, by invoking a decision tree building subroutine 400, discussed further below in conjunction with Fig. 4. The television programming recommender 100 may be embodied as any computing device, such as a personal computer or workstation, that contains a processor, such as a central processing unit (CPU), and memory, such as RAM and ROM.

For each positive and negative program example (i.e., programs watched and not watched), a number of well-known attributes are classified in the user profile, such as the time, date, duration, channel, rating, title and genre of a given program. As shown in Fig. 2, the various attributes are positioned in the hierarchical decision tree 200 based on a ranking of the entropy of each attribute. The illustrative decision tree 200 includes a root node 205 and a number of sub-nodes, such as sub-nodes 210, 220, 245, 250, 260, 265 and 270. Each node and sub-node in the decision tree 200 corresponds to a given attribute from the user profile. Each leaf node in the decision tree 200, such as the leaf nodes 225, 230, 235, 240, and 281-293, corresponds to either a positive or negative recommendation for a program mounted at the corresponding leaf node.

For example, if a given program in the training data has a duration of more than 45 minutes, but less than or equal to 65 minutes, and is a western (genre), the program will be classified under leaf node 235 as a positive example. Thereafter, if a given program in the test data has values meeting this criteria for these attributes the program will be a recommended program.

The decision tree 200 is built using a decision tree process 300, shown in FIG. 3, that implements a "top-down divide and conquer" approach. The decision tree 200 can

thereafter be converted to rules. The decision tree rules allow the introspective analysis of the behavior of the present invention. The decision tree techniques of the present invention are based on the well-established theory of Ross Quinlan, discussed, for example, in C4.5: Programs for Machine Learning, Morgan Kaufmann Publishers, Palo Alto, CA 1990, incorporated by reference herein. In addition, the decision tree is easily calculated, can be used in real-time and can be extended to any number of classes.

#### DECISION TREE PRINCIPLES

Decision Trees are based on the well-established theory of concept learning developed in the late 1950s by Hunt et. al.. See, for example, Hunt et al., Experiments in Induction, Academic Press, New York (1966). It was further extended and made popular by Breiman et. al. Breiman et al., Classification and Regression Trees, Belmont, CA (Wadsworth, 1984); Quinlan J. R., Learning Efficient Classification Procedures and their Application to Chess End Games, Michalski R. S., Carbonell J. G. and Mitchell T. M. (Eds.), in Machine Learning: An Artificial Approach, Vol. 1, Morgan Kaufmann Publishers Inc., Palo Alto, California (1983); Quinlan J. R., Probabilistic Decision Trees, Kodratoff Y. and Michalski R. S. (Eds.), in Machine Learning: An Artificial Approach, Vol. 3, Morgan Kaufmann Publishers Inc., Palo Alto, California, (1990); and Quinlan J. R., C4.5: Programs for Machine Learning, Morgan Kaufmann Publishers, San Mateo, CA (1993).

The basic method for constructing a decision tree is as follows: Let  $T$  be a set of training cases and let the classes be denoted as  $\{C_1, C_2, \dots, C_k\}$ . The following three possibilities exist:

$T$  contains one or more cases, all belonging to a single class  $C_j$ :

The decision tree for  $T$  is a leaf identifying class  $C_j$ .

$T$  contains no cases:

The decision tree is again a leaf, but the class to be associated with the leaf must be determined from information other than  $T$ . For example, the leaf can be chosen with the aid of background knowledge about the domain.

$T$  contains cases that belong to a mixture of classes:

In such a case, the approach is to refine  $T$  into subsets of cases that seem to be heading towards, single class collection of cases. A test is so chosen, based on a attribute, that has one or more mutually exclusive outcomes  $\{O_1, O_2, \dots, O_n\}$ .  $T$  is partitioned into subsets  $T_1, T_2, \dots, T_n$ , where  $T_i$  contains all the cases in  $T$  that have outcome  $O_i$  of the chosen outcome. The decision tree for  $T$  consists of a decision node identifying the test, and one branch for each possible outcome. The same tree-building approach is applied recursively to

each subset of training cases, such that the  $i$ th branch leads to the decision tree constructed from the subset  $T_i$  of training cases.

The tree building process depends on the choice of an appropriate test. Any test that divides  $T$  in a nontrivial way, so that at least two of the subsets  $\{T_i\}$  are not empty, will eventually result in a partition into single class subsets, even if all or most of them contain a single training case. However, the objective of the present invention is not to merely build a tree from any partition but to build a tree that reveals the structure of the data set and has predictive power for unseen cases. The test is normally chosen based on gain criterion, based on information theory and explained below.

Suppose that we have some test with  $n$  possible outcomes that partitions the set  $T$  of training cases into subsets  $T_1, T_2, \dots, T_n$ . If this test is to be evaluated without exploring subsequent divisions of the  $T_i$ 's, the only information available to us is the distribution of classes in  $T$  and its subsets. Let  $S$  be any set of cases and let,  $\text{freq}(C_i, S)$  denote the number of cases in  $S$  that belong to class  $C_i$  and  $|S|$  be the number of cases in set  $S$ . The information theory that underpins the criterion for selecting the test is as follows: the information conveyed by a message depends on its probability and can be measured in bits as minus the logarithm to base 2 of that probability. As an example, if there are eight equally probable messages, the information conveyed by any one of them is  $-\log_2(1/8)$  or 3 bits. On selecting one case at random from a set  $S$  of cases that belongs to some class  $C_j$ , then that message would have a probability of

$$\frac{\text{freq}(C_j, S)}{|S|}$$

and the information the message conveys is

$$-\log_2 \left( \frac{\text{freq}(C_j, S)}{|S|} \right) \text{ bits.}$$

In order to find the expected information from such a message pertaining to class membership, we sum over the classes in proportion to their frequencies in  $S$ , giving

$$\text{info}(S) = - \sum_{j=1}^k \frac{\text{freq}(C_j, S)}{|S|} \times \log_2 \left( \frac{\text{freq}(C_j, S)}{|S|} \right) \text{ bits.}$$

On applying to the set of training cases,  $\text{info}(T)$  measures the average amount of information needed to identify the class of a case in  $T$ . This quantity is often known as the entropy of the set  $S$ . When  $T$  has been partitioned in accordance with  $n$  outcomes of a test  $X$ ,

the expected information can then be found as the weighted sum over the subsets and is given by:

$$info_X(T) = \sum_{i=1}^n \frac{|T_i|}{|T|} \times info(T_i).$$

The following quantity:

5  $gain(X) = info(T) - info_X(T)$

measures the information that is gained by partitioning T in accordance with the test X and is often called as the gain criterion. This criterion, then, selects a test to maximize the information gain commonly referred to as the mutual information between the text X and the class.

10 Although the gain criterion gives good results, it has a serious deficiency namely that of having a strong bias in favor of tests with many outcomes [Quinlan, 1990]. As an example, consider a hypothetical medical diagnostic task in which one of the attributes contains patient identification. Since every such identification is intended to be unique, partitioning the set of training cases on the values of this attribute will lead to a large number  
15 of subsets, each containing just one case. As all of these one case subsets would contain cases of a single class,  $info_X(T)$  would be 0. Thus the information gain from using this attribute to partition the set of training cases is maximal. However, from the point of view of prediction, such a division is of not much use.

The bias inherent in the gain criterion is rectified by normalization wherein the  
20 apparent gain attributable to tests with many outcomes is adjusted. Now consider the information content of a message pertaining to a case that indicates not the class to which the case belongs, but to the outcome of the test. Analogous to the definition of  $info(S)$ , we have

$$split\ info(X) = - \sum_{i=1}^n \frac{|T_i|}{|T|} \times \log_2 \left( \frac{|T_i|}{|T|} \right).$$

This represents the potential information generated by dividing T into n  
25 subsets, whereas the information gain measures the information relevant to classification that arises from the same division. Then, the expression  $gain\ ratio(X) = gain(X) / split\ info(X)$  expresses the proportion of information generated by the split. When the split information is small, this ratio is unstable. To avoid this, the gain ratio criterion selects a test to maximize the ratio subject to the constraint that the information gain must be at least as great as the  
30 average gain over all tests examined.



The description above for the construction of a decision tree was based on the assumption that the outcome of a test for any case can be determined. However, in reality data often has missing attribute values. This could be because the value is not relevant to a particular case, was not recorded when the data was collected, or could not be deciphered by the subject responsible for entering the data. Such incompleteness is typical of real-world data. We are then left with two choices: either a significant proportion of available data must be discarded and some test cases pronounced unclassifiable, or the algorithms must be amended to cope with missing attribute values. In most situations, the former is unacceptable as it weakens the ability to find patterns. Modification of the criteria for dealing with missing attribute values can then be realized as follows.

Let  $T$  be the training set and  $X$  a test based on some attribute  $A$ , and suppose that the value of  $A$  is known only in a fraction  $F$  of the cases in  $T$ .  $\text{info}(T)$  and  $\text{info}_X(T)$  are calculated as before, except that only cases with known values of  $A$  are taken into account. The definition of gain can then be amended to:

$$\begin{aligned} \text{gain}(X) &= \text{probability } A \text{ is known} \times (\text{info}(T) - \text{info}_X(T)) \\ &+ \text{probability } A \text{ is not known} \times 0 \\ &= F \times (\text{info}(T) - \text{info}_X(T)). \end{aligned}$$

This definition of gain is nothing but the apparent gain from looking at cases with known values of the relevant attribute, multiplied by the fraction of such cases in the training set. Similarly the definition of split  $\text{info}(X)$  can also be altered by regarding the cases with unknown values as an additional group. If a test has  $n$  outcomes, its split information is computed as if the test divided the cases into  $n+1$  subsets. Using the modified definitions of gain and split  $\text{info}$  partitioning the training set is achieved in the following way. When a case from  $T$  with known outcome  $O_i$  is assigned to subset  $T_i$ , the probability of that case belonging in subset  $T_i$  is 1 and in all other subsets 0. However, when the outcome is not known, only a weaker probabilistic statement can be made. If the case has a known outcome, this weight is 1; if the case has an unknown outcome, the weight is just the probability of outcome  $O_i$  at that point. Each subset  $T_i$  is then a collection of possibly fractional cases so that  $|T_i|$  can be reinterpreted as the sum of the fractional weights of the cases in the set. It is possible that the training cases in  $T$  might have non-unit weights to start with, since  $T$  might be one subset of an earlier partition. In general, a case from  $T$  with weight  $w$  whose outcome is not known is assigned to each subset  $T_i$  with weight

$$w \times \text{probability of outcome } O_i.$$

The latter probability is estimated as the sum of the weights of cases in T known to have outcome  $O_i$ , divided by the sum of the weights of the cases in T with known outcomes on this test.

If we assume the classes to be 'shows-watched' and 'shows-not-watched',  
5 then the format of the DT is such that, it has nodes and leaves where nodes correspond to some test to be performed and leaves correspond to the two classes. Testing an unknown case (show) now involves in parsing the tree to determine as to which class the unknown case belongs to. However, if at a particular decision node we encounter a situation wherein the relevant attribute value is unknown, so that the outcome of the test cannot be determined, the  
10 system then explores all possible outcomes and combines the resulting classifications. Since there can now be multiple paths from the root of a tree or from the subtree to the leaves, the classification is then a class distribution rather than a single class. When the class distribution for the unseen case has been obtained, the class with the highest probability is assigned as the predicted class.

15 Fig. 3 is a flow chart describing an exemplary decision tree process 300 embodying principles of the present invention. As shown in FIG. 3, the decision tree process 300 initially selects a random subset, W, from the training data during step 310. Thereafter, the decision tree process 300 executes the decision tree building subroutine 400, discussed further below in conjunction with FIG. 4, during step 320 to build a decision tree for the  
20 current window, W.

Once the decision tree building subroutine 400 has built the decision tree for the current window, W, the training set is scanned for exceptions to the decision tree during step 330. As previously indicated, the decision tree randomly selects a subset of positive and negative examples from the total set of examples given to it and uses the subset to build a  
25 decision tree. Thereafter, the decision tree process 300 applies the generated tree on the remaining examples during step 330. If any example gets misclassified, the decision tree process 300 adds the misclassified example (exceptions) to the originally generated random subset, in the following manner. If exceptions to the decision tree are found during step 330, then one or more of the exceptions are inserted into the window, W, during step 340 and  
30 program control repeats from step 320. If no exceptions to the decision tree are found during step 330, then program control terminates. This process is continued until no performance improvement can be found from one iteration to the next.

In a further variation, examples are given to the decision tree process 300 based on an assumption of what the users likes and dislikes, where the user has graded the

shows, for example, on a scale of 1 to 5. These grades can be incorporated into the decision tree in such a way that some bias is added. Namely, the process 300 adds the misclassified example only if the user's grade exceeds a predefined (or user-specified) value, such as 3. In other words, the user indicates how important it is for him or her that the system should

5 recommend shows that he or she likes/dislikes. In this manner, the present invention will be more tailored to the user's likes/dislikes. Likewise, there will be some performance improvement as the system does not attempt to cover all the examples.

Fig. 4 is a flow chart describing an exemplary decision tree building subroutine 400 embodying principles of the present invention. As shown in FIG. 4, the

10 decision tree building subroutine 400 initially selects the best attributeduring step 410 that minimizes the entropy function,  $H$ , as follows:

$$H = \sum -P(i) \log P(i)$$

where  $P(i)$  is the probability associated with the  $i^{\text{th}}$  class. Thereafter, the training instances are categorized during step 420 into subsets by this attribute.

15 Finally, the process is repeated recursively during step 430 until each subset contains instances of one kind (class) or a predefined statistical criterion is satisfied. Program control then returns to the decision tree process 300 (step 330).

#### DECISION TREE EXAMPLE

Fig. 5 is a sample table 500 that illustrates the creation of a decision tree in

20 accordance with well-known techniques. As shown in FIG. 5, the table 500 contains a plurality of records, each associated with different combinations of the attributes size, color and surface, as identified in fields 520, 530, 540, respectively. Each record has been classified into a given class, as identified in field 510.

According to the decision tree building subroutine 400, the decision tree is

25 constructed by first calculating the entropy for each attribute (size, color and surface) during step 410, as follows:

$$\text{Size: } H = \frac{1}{6} \left( -\frac{1}{1} \log \frac{1}{1} \right) + \frac{4}{6} \left( -\frac{2}{4} \log \frac{2}{4} - \frac{2}{4} \log \frac{2}{4} \right) + \frac{1}{6} \left( -\frac{1}{1} \log \frac{1}{1} \right) = 0.462$$

$$\text{Color: } H = \frac{3}{6} \left( -\frac{2}{3} \log \frac{2}{3} - \frac{1}{3} \log \frac{1}{3} \right) + \frac{3}{6} \left( -\frac{3}{3} \log \frac{3}{3} \right) = 0.318$$

$$\text{Surface: } H = \frac{5}{6} \left( -\frac{3}{5} \log \frac{3}{5} - \frac{2}{5} \log \frac{2}{5} \right) + \frac{1}{6} \left( -\frac{1}{1} \log \frac{1}{1} \right) = 0.56$$

The attribute "color" is selected during step 420 as the root node 605, since it has the minimum entropy. Therefore, the attribute "color" is removed from the attributes and the process is repeated during step 430, as follows:

$$\text{Size: } H = \frac{1}{3} \left( -\frac{1}{1} \log \frac{1}{1} \right) + \frac{2}{3} \left( -\frac{2}{2} \log \frac{2}{2} \right) = 0$$

5      Surface:  $H = \frac{3}{3} \left( -\frac{2}{3} \log \frac{2}{3} - \frac{1}{3} \log \frac{1}{3} \right) = 0.636$

On the second pass through the data, the attribute "size" is selected during step 420 as the second decision node 610, since it has the minimum entropy. The resulting decision tree is shown in Fig. 6.

10      Once the decision tree 200 is created in accordance with the present invention, the decision tree can be applied to an electronic program guide 140 to identify a set of programs that will likely be of interest to the user. For each program in the electronic program guide 140, the decision tree is traversed to classify the program into one of the leaf nodes. Based on the assigned leaf node, a given program is either a positive or negative recommendation.

15      It is to be understood that the embodiments and variations shown and described herein are merely illustrative of the principles of this invention and that various modifications may be implemented by those skilled in the art without departing from the scope and spirit of the invention.

## CLAIMS:

1. A method for obtaining a recommendation (145) for a television program for a user, said program having attributes, said method comprising the steps of:  
obtaining a viewing history (130) for said user;  
analyzing positive and negative examples of training programs that are liked by said user;  
5 generating a profile (120) containing a number of attributes for said positive and negative examples;  
positioning said attributes in a hierarchical decision tree (200); and determining a recommendation (145) for said television program based on a location of said television program in said decision tree (200).  
10
2. A method for obtaining a recommendation (145) for a television program for a user, said program having attributes, said method comprising the steps of:  
obtaining examples of programs that are liked and disliked by said user;  
generating a hierarchical decision tree (200) having nodes comprised of said attributes, said  
15 hierarchy based on a ranking of the entropy of each of said attributes; and recommending said television program based on a location of said television program in said decision tree (200).
3. The method of claim 1 or 2, wherein said profile (120) also includes  
20 information provided by said user.
4. The method of claim 1, 2 or 3 wherein said recommendation (145) is a positive or negative recommendation.
- 25 5. The method of any one or more of claims 1 to 4, wherein said positive or negative examples are scored by said user.
6. The method of claim 5, wherein said score is utilized to bias the processing of examples that are misclassified in said decision tree (200).

7. The method of any one or more of claims 1 to 6, wherein the placement of said attributes in said decision tree (200) is based on a ranking of the entropy of each of said attributes.

5

8. The method of claim 7, wherein said entropy,  $H$ , of each of said attributes is obtained using the following expression:

$$H = \sum -P(i) \log P(i)$$

where  $P(i)$  is the probability associated with the  $i^{\text{th}}$  class.

10

9. The method of any one or more of claims 1 to 8, wherein said positioning step further comprises the steps of selecting an attribute that minimizes said entropy function,  $H$ , categorizing said training data into subsets by this attribute; and repeating said method recursively until each subset contains instances of one kind or a predefined statistical criterion is satisfied.

15

10. The method of any one or more of claims 1 to 9, further comprising the step of applying said decision tree 200 to additional positive and negative examples to identify a misclassified example.

20

11. The method of claim 10, wherein said positioning step further comprises the step of inserting said misclassified example into said original positive and negative examples and repeating said positioning step until a predefined threshold is satisfied.

25

12. A system for obtaining a recommendation (145) for a television program for a user, said program having attributes, comprising:

a memory for storing computer readable code; and a processor operatively coupled to said memory, said processor configured to:

obtain a viewing history (130) for said user;

30

analyze positive and negative examples of training programs that are liked by said user; generate a profile (120) containing a number of attributes for said positive and negative examples;

position said attributes in a hierarchical decision tree (200), and determine a recommendation (145) for said television program based on a location of said television program in said decision tree (200).

- 5 13. A system for obtaining a recommendation (145) for a television program for a user, said program having attributes, comprising:  
a memory for storing computer readable code; and a processor operatively coupled to said memory, said processor configured to:  
obtain examples of programs that are liked and disliked by said user;
- 10 generate a hierarchical decision tree (200) having nodes comprised of said attributes, said hierarchy based on a ranking of the entropy of each of said attributes; and recommend said television program based on a location of said television program in said decision tree (200).

1/5

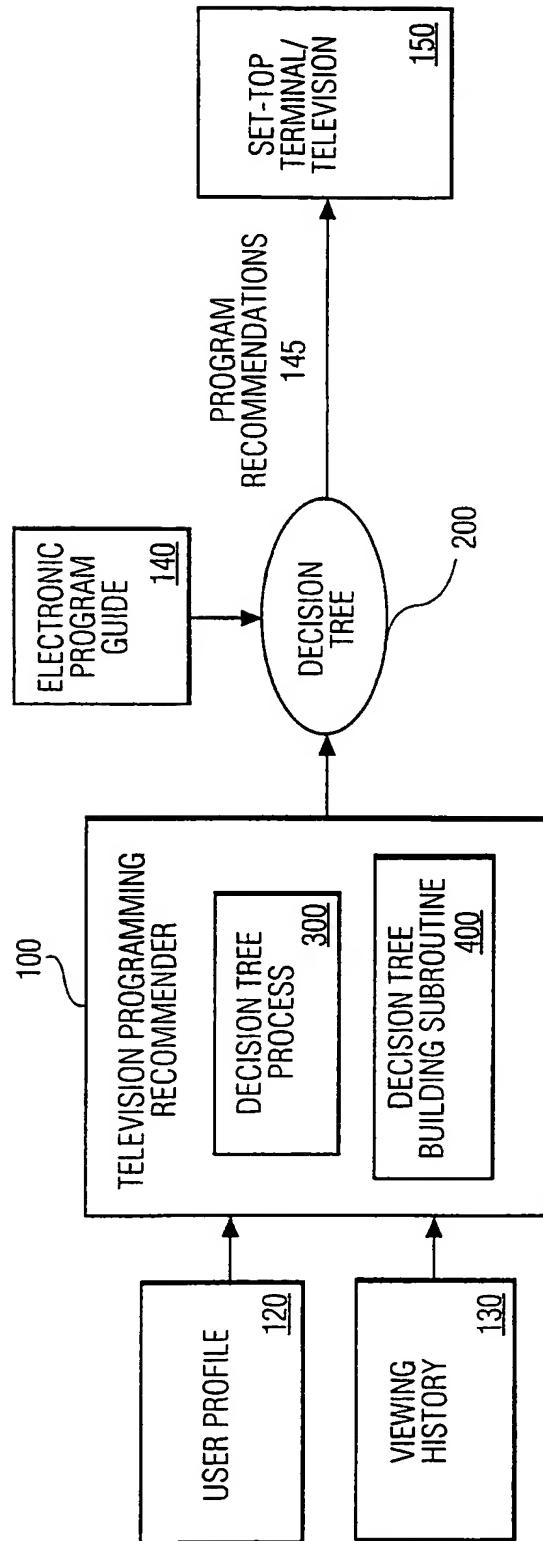


FIG. 1



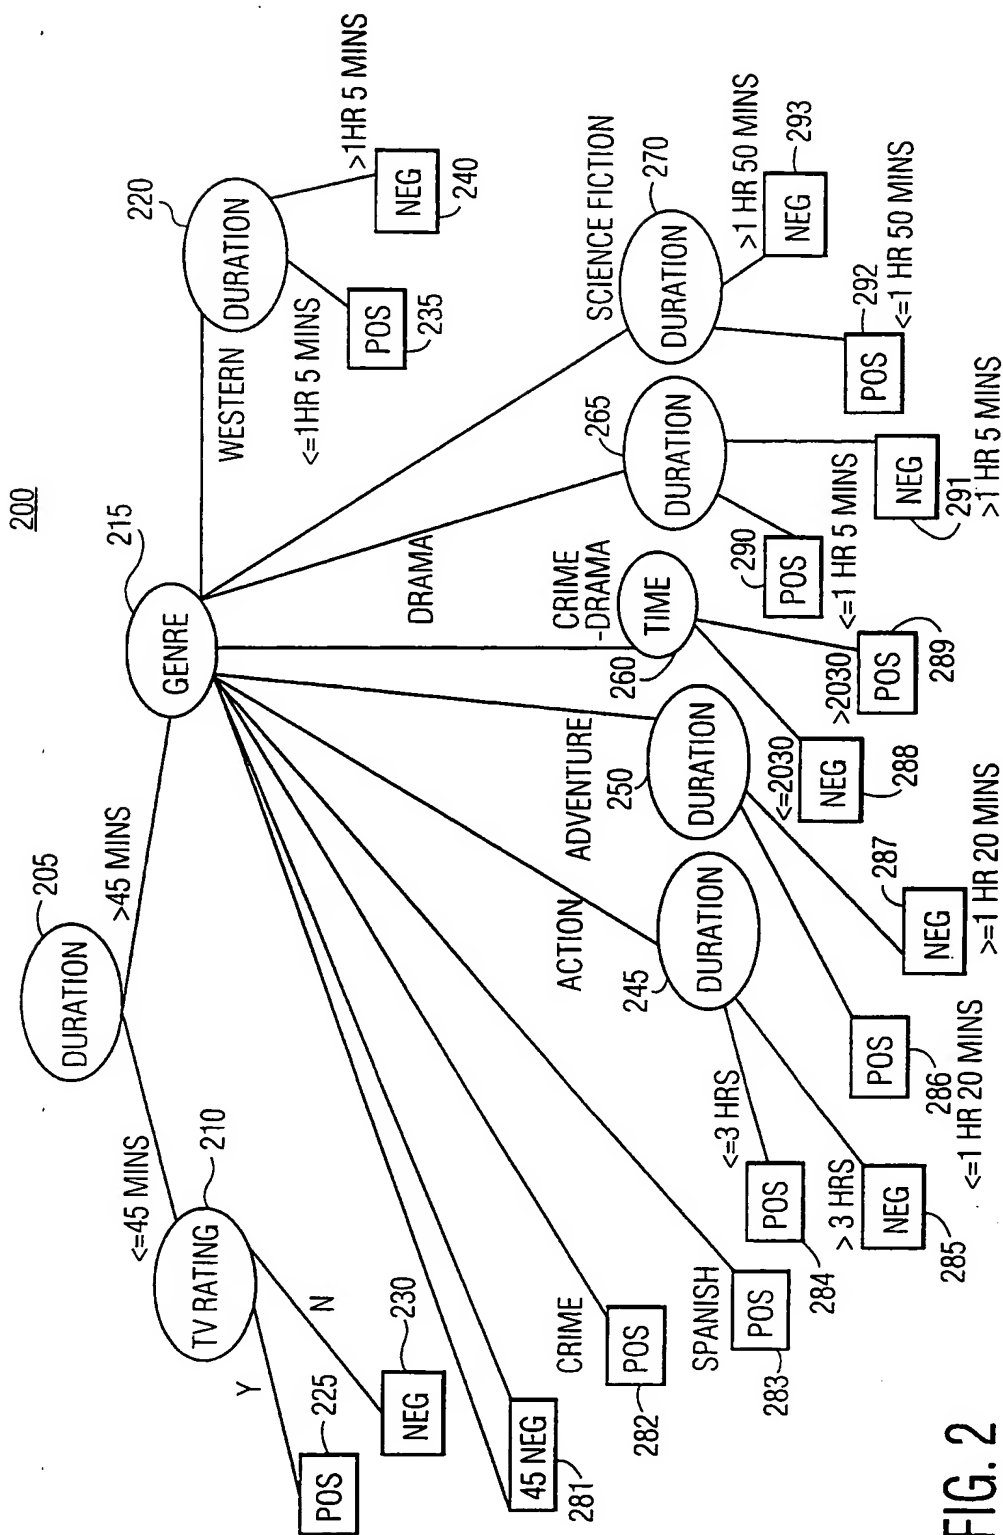


FIG. 2

3/5

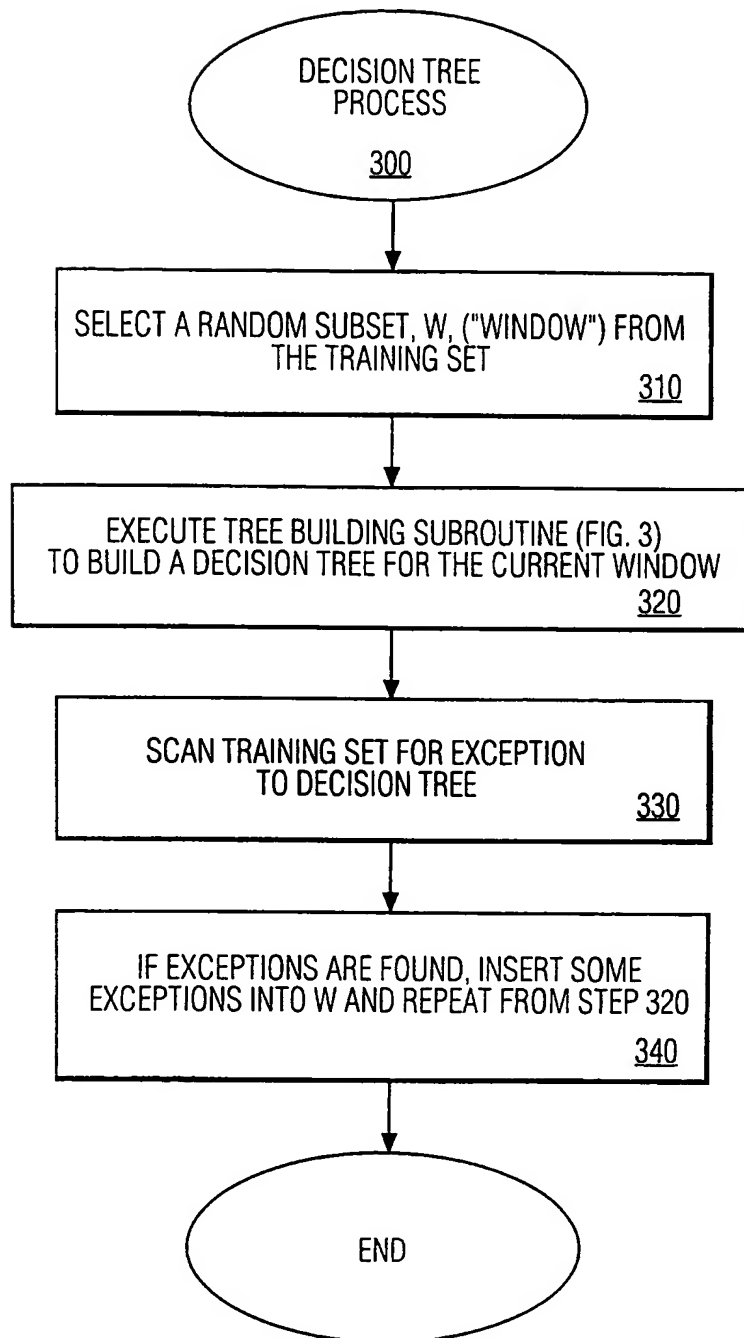


FIG. 3

4/5

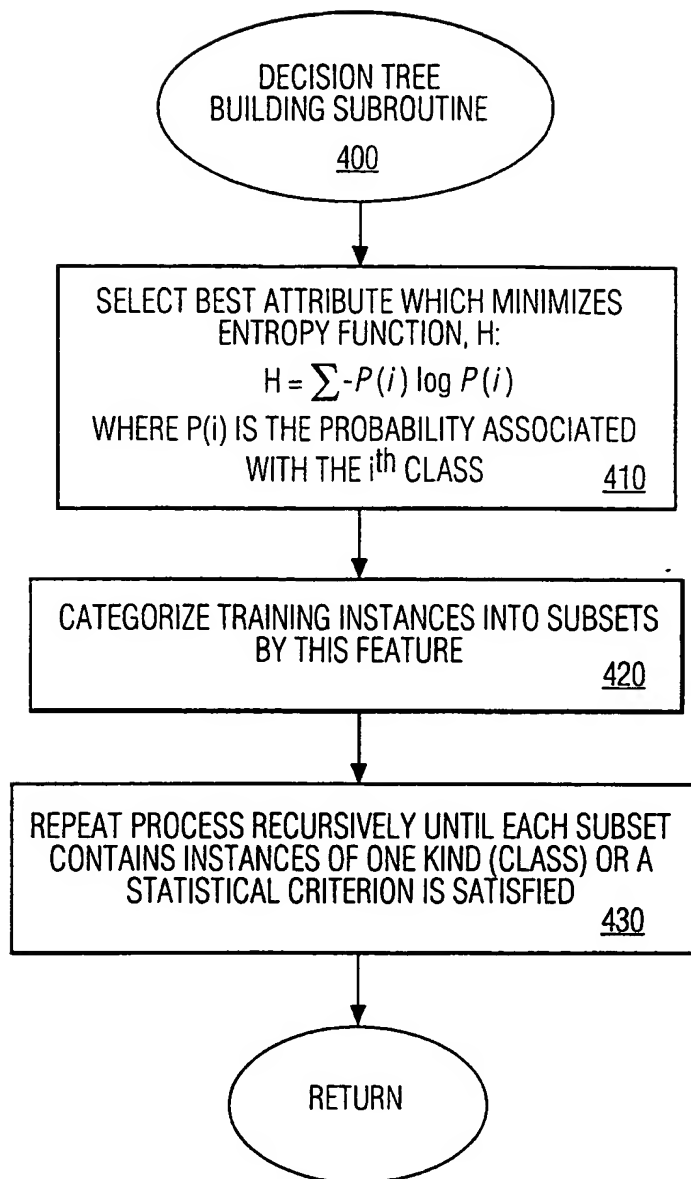


FIG. 4

5/5

510 CLASS	520 SIZE	530 COLOR	540 SURFACE
A	SMALL	YELLOW	SMOOTH
A	MEDIUM	RED	SMOOTH
A	MEDIUM	RED	SMOOTH
A	BIG	RED	ROUGH
B	MEDIUM	YELLOW	SMOOTH
B	MEDIUM	YELLOW	SMOOTH

FIG. 5

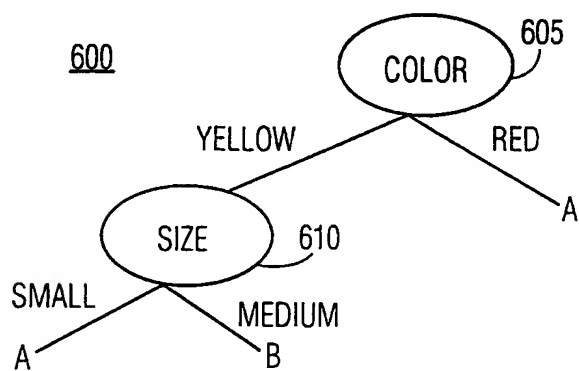


FIG. 6

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 00/12263

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04N7/16 H04N7/173

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	US 5 340 317 A (FREEMAN MICHAEL J) 23 August 1994 (1994-08-23) the whole document	1,2,12, 13 3-11
Y A	EP 0 854 645 A (TEXAS INSTRUMENTS INC) 22 July 1998 (1998-07-22) the whole document	1,2,12, 13 3-11
A	WO 99 07142 A (INDEX SYSTEMS INC ;HANCOCK KEN (US); HUGON JACQUES (US); CONNOR DA) 11 February 1999 (1999-02-11) page 2, line 29 -page 5, line 2	1-13
A	WO 99 01984 A (NDS LTD ;ATLOW SHABTAI (IL); KRANC MOSHE (IL); TSURIA YOSSEF (IL);) 14 January 1999 (1999-01-14) page 4, line 7 -page 13, line 25	1-13
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*S\* document member of the same patent family

Date of the actual completion of the international search

21 March 2001

Date of mailing of the international search report

03/04/2001

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl.  
Fax. (+31-70) 340-3016

Authorized officer  
Greve, M

# INTERNATIONAL SEARCH REPORT

Int lional Application No  
PCT/EP 00/12263

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 801 747 A (BEDARD KAREN) 1 September 1998 (1998-09-01) abstract ----	1-13
A	EP 0 963 114 A (LUCENT TECHNOLOGIES INC) 8 December 1999 (1999-12-08) abstract ----	1-13
A	US 5 973 683 A (CRAGUN BRIAN JOHN ET AL) 26 October 1999 (1999-10-26) abstract -----	1-13

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/12263

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5340317	A	23-08-1994	US 5213510 A	25-05-1993
EP 0854645	A	22-07-1998	JP 10207914 A	07-08-1998
			SG 67469 A	21-09-1999
			US 6163316 A	19-12-2000
WO 9907142	A	11-02-1999	AU 8675698 A	22-02-1999
			CN 1269942 T	11-10-2000
			EP 1016279 A	05-07-2000
WO 9901984	A	14-01-1999	AU 7929698 A	25-01-1999
US 5801747	A	01-09-1998	AU 729623 B	08-02-2001
			AU 7182598 A	03-06-1998
			BR 9713510 A	06-06-2000
			CN 1286868 A	07-03-2001
			EP 1013082 A	28-06-2000
			HU 0001633 A	28-09-2000
			WO 9821877 A	22-05-1998
EP 0963114	A	08-12-1999	US 6100916 A	08-08-2000
			JP 2000032417 A	28-01-2000
US 5973683	A	26-10-1999	NONE	